

TWF.ACW.4090

Aluminium Curtain Wall System



With a mere 40mm face width and thermal break insulation, TWF.ACW.4090 gives a very sleek and slim look without compromising on strength and durability. The unique feature in this system is that we can provide all kinds of different thicknesses in glasses as it has an adjustable notch. The system has outstanding performance and its ease of installation makes it possible to suit individual project requirements.

Features


Exterior Visible Width	40mm
Mullion Depth	90mm
System Depth	118mm to 138mm
Glass Thickness	12mm - 28mm
Thermal Break	Yes (Optional)
Type of Holding on Glazing	Pressure Plate
Sound Reduction	Upto 42 dB
Reinforcement	Optional Steel Reinforcement in case of high wind loads

Compatibility


ACA.50	ASA.30
ACA.55	ASA.38 (2 Track)
ACA.72.PPO	

* Above data is for reference purpose only. It is advisable to take prior confirmation from our design team before placing any order.

System Typology

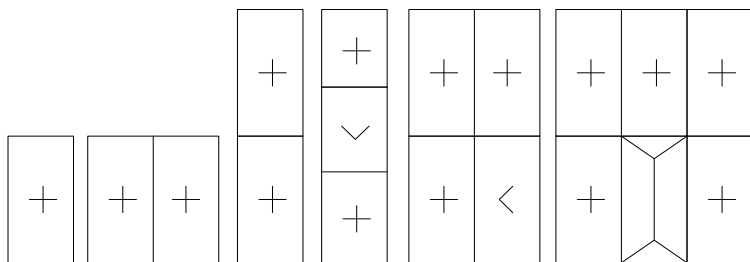


TWF.ACW.4090

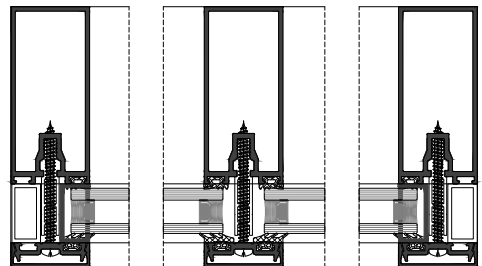

TWF.ACW.5095

Aluminium Curtain Wall System

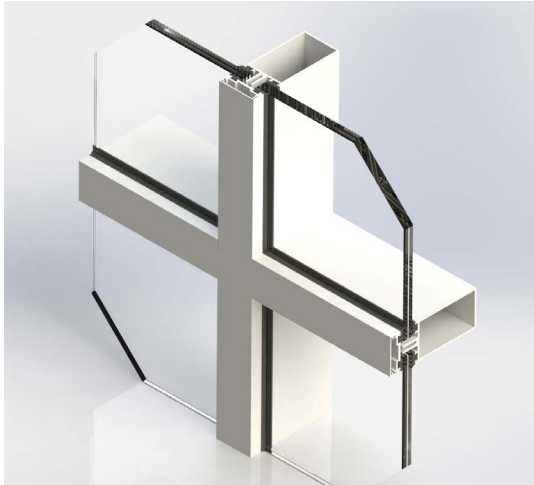

The system is available in a variety of mullion and transom depths which combined with bespoke cover caps (on Request) and outstanding performance and ease of installation to suit individual project requirements.

Features


Exterior Visible Width	50mm
Mullion Depth	95mm
System Depth	125mm to 155mm
Glass Thickness	12mm - 32mm
Thermal Break	No
Type of Holding on Glazing	Pressure Plate
Sound Reduction	Upto 42 dB
Reinforcement	Optional Steel Reinforcement in case of high wind loads

Compatibility


ACA.50	ASA.30
ACA.55	ASA.38 (2 Track)
ACA.72.PPO	

* Above data is for reference purpose only. It is advisable to take prior confirmation from our design team before placing any order.

System Typology

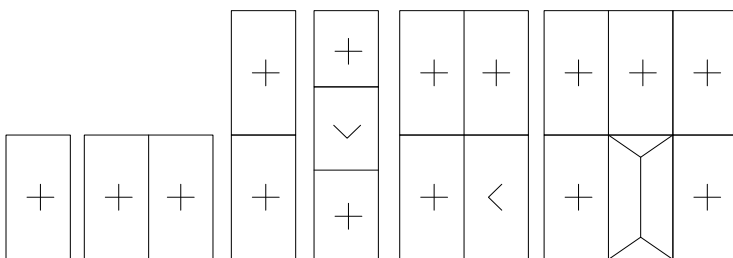


TWF.ACW.5095

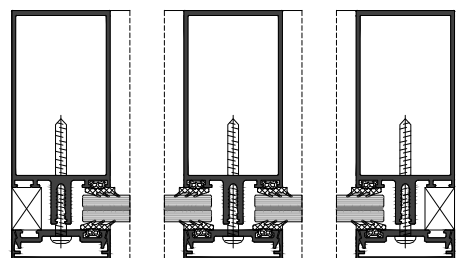

TWF.ACW.4565

Aluminium Curtain Wall System

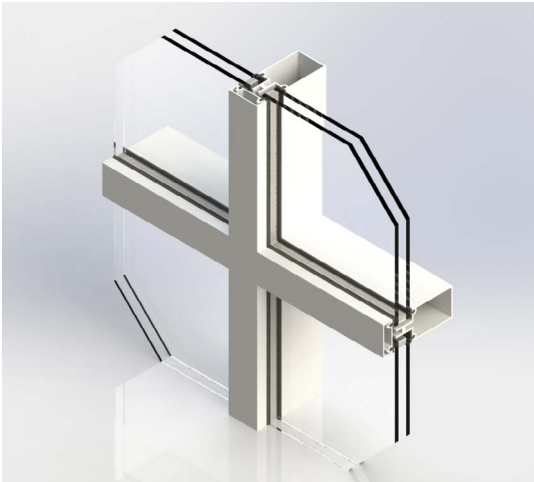

TWF.ACW.4565 is designed keeping in mind to reduce the depth of the Fixed Glazing System. It is mainly used where there is the Jamb width Limitations, but still wants to achieve large glazing surfaces. Variety of glass from SGU to DGU can be used in this Curtain wall system.

Features


Exterior Visible Width	45mm
Mullion Depth	65mm
System Depth	93mm to 125mm
Glass Thickness	6mm - 40mm
Thermal Break	No
Type of Holding on Glazing	Pressure Plate
Sound Reduction	Upto 55 dB
Reinforcement	Optional Steel Reinforcement in case of high wind loads

Compatibility


ACA.50	ASA.30 (2 Track)
ACA.55	

* Above data is for reference purpose only. It is advisable to take prior confirmation from our design team before placing any order.

System Typology

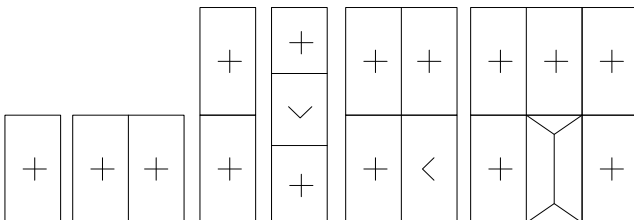

TWF.ACW.4565

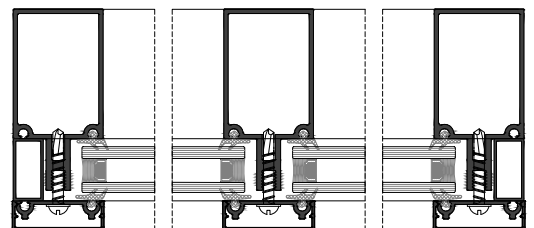

TWF.ACW.45108

Aluminium Curtain Wall System



TWF.ACW.4565 is designed keeping in mind to achieve larger double height spans with avoiding the structural horizontal member. The depth of 108mm gives freedom to go upto 7000mm without any horizontal structural member resulting in a very sleek Elevational look.

Features


Exterior Visible Width	45mm
Mullion Depth	108mm
System Depth	93mm to 125mm
Glass Thickness	6mm - 40mm
Thermal Break	No
Type of Holding on Glazing	Pressure Plate
Sound Reduction	Upto 55 dB
Reinforcement	Optional Steel Reinforcement in case of high wind loads

Compatibility

ACA.50	ASA.30
ACA.55	ASA.38 (2 Track)
ACA.72.PPO	

* Above data is for reference purpose only. It is advisable to take prior confirmation from our design team before placing any order.

System Typology

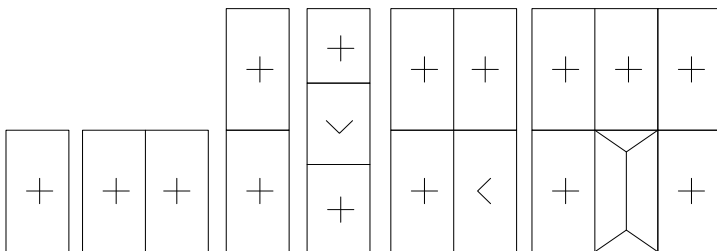

TWF.ACW.45108

